

ECO-LITE

Specialty Lighting Products

33 Rockland Park Ave, Tappan, NY 10983

Tel. 800-345-9652 Fax 845-365-9777

www.eco-lite.com

Product No. EL-JMMG16502E-LED

New Construction recessed fixture comprised of separate housing and trim. Trim design allows use in ceilings up to 2" thick. No IC must maintain 3" clearance from any insulation on all sides. Built in electronic transformer. Vertical: Inner Ring 30° - Outer Ring 30°



Lamp: (2) MR16

Input Voltage: 120V

Output Voltage: 12V

Max Wattage: 50W

Length: 20-5/8"

Width: 3-3/8"

Height: 6"

Aperture: 7-1/8"L x 3-3/8"W

Cut Out: 7-1/2"L x 3-3/4"W

Product Options

Trim/Gimbal Finish:



AW

SB

SS

WB


Specifications

Input Line Voltage:	12V AC/DC & 120V*
Input Power	7W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
CCT	24K, 27K, 30K, 41K
CRI	82
Beam Angles	20 & 40

Lens Angles



SEE DIMMENSIONS GUIDE FOR ALL AVAILABLE FIXTURE SIZES BELOW:

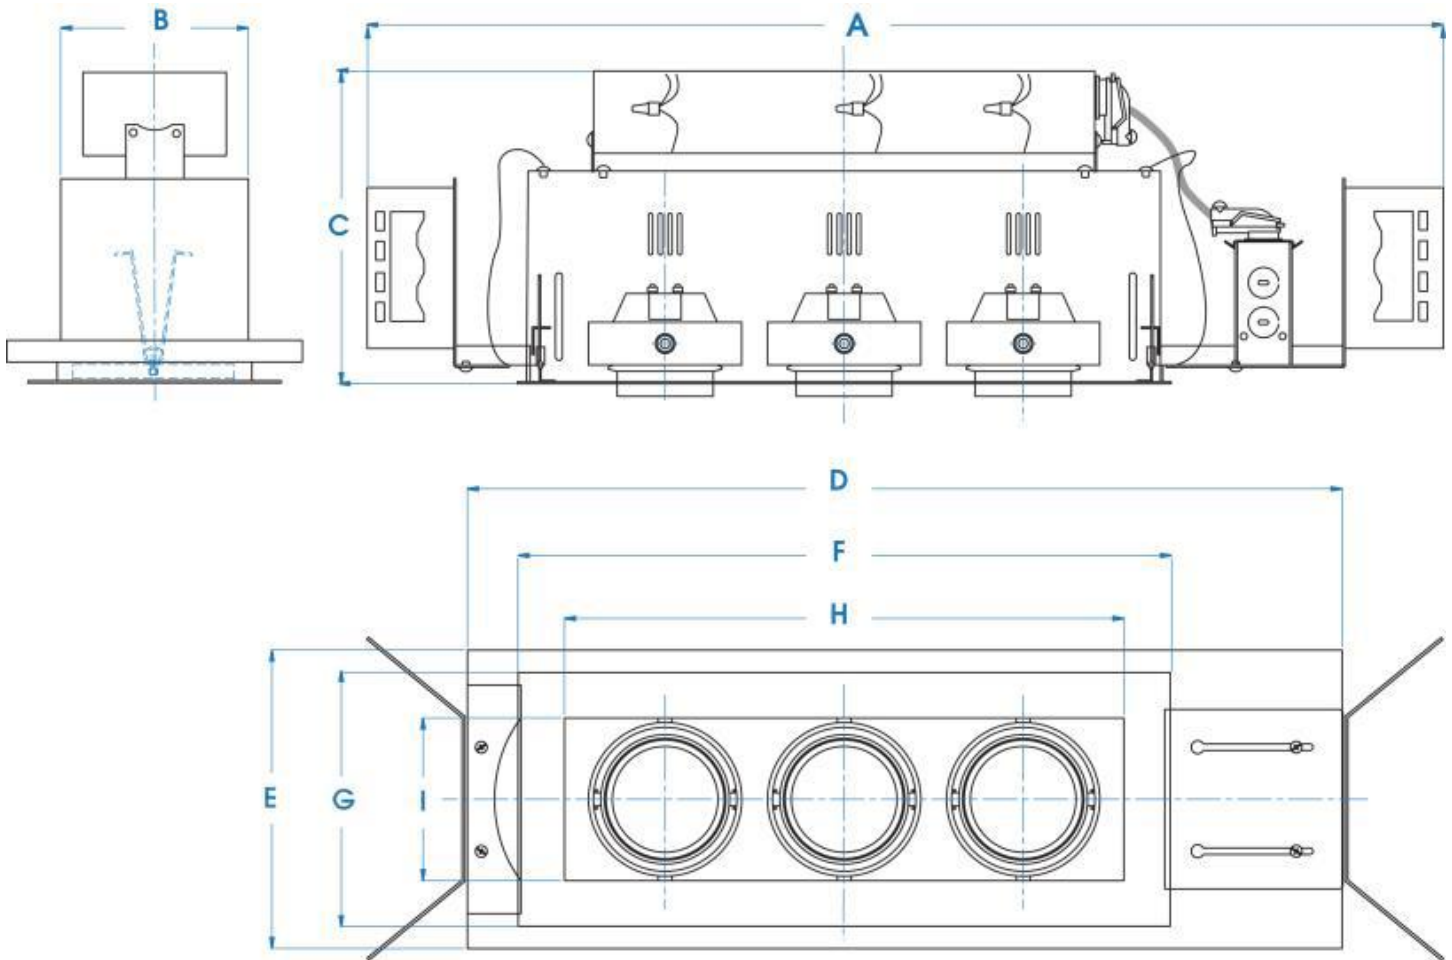

DIMENSIONS

MODEL	HOUSING			HOUSING FRAME		TRIM		APERTURE		CUT-OUT	
	A	B	C	D	E	F	G	H	I		
MMG 1650-1E	17-3/8"	3-3/8"	6"	10-1/4"	5-1/8"	5-1/2"	5-1/8"	3-3/4"	3-3/8"	4-1/8"	3-3/4"
MMG 1650-2E	20-5/8"	3-3/8"	6"	13-7/8"	5-1/8"	8-7/8"	5-1/8"	7-1/8"	3-3/8"	7-1/2"	3-3/4"
MMG 1650-3E	24-1/2"	3-3/8"	6"	17-5/8"	5-1/8"	12-5/8"	5-1/8"	10-7/8"	3-3/8"	11-1/4"	3-3/4"
MMG 1650-4E	28"	3-3/8"	6"	21-1/4"	5-1/8"	16-1/4"	5-1/8"	14-1/2"	3-3/8"	14-7/8"	3-3/4"
MMG 1650-6E	37-3/8"	3-3/8"	6"	30-5/8"	5-1/8"	23-5/8"	5-1/8"	21-7/8"	3-3/8"	22-1/4"	3-3/4"