

ECO-LITE


Specialty Lighting Products

33 Rockland Park Ave, Tappan, NY 10983

Tel. 800-345-9652 Fax 845-365-9777

www.eco-lite.com

Product No. EL-JMYP303-LED

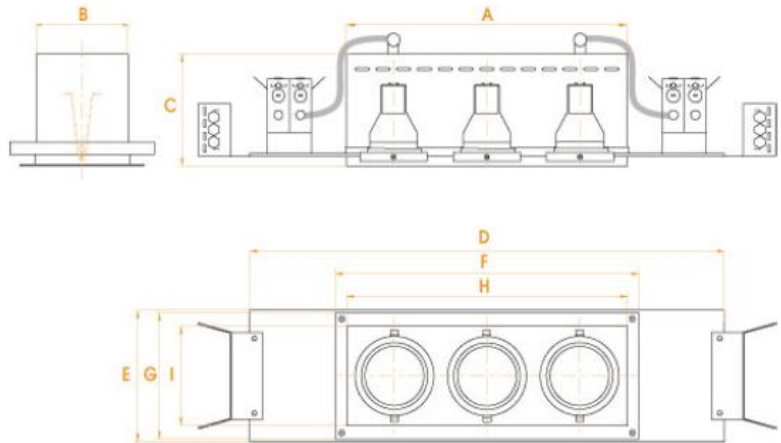

CATALOG INFORMATION

MODEL	LAMP	LAMPS	FINISH*
MY	P30 – PAR30	3 – 3-Linear	BB – Black Trim / Black Gimbal / Black Interior SB – Silver Trim / Black Gimbal / Black Interior WB – White Trim / Black Gimbal / Black Interior

DIMENSIONS

HOUSING			HOUSING FRAME		TRIM		APERTURE		CUT-OUT	
L	W	H	L	W	L	W	L	W	L	W
A	B	C	D	E	F	G	H	I		
35-1/8"	6-3/8"	7-1/8"	27-3/4"	8"	21"	5-1/8"	19-1/4"	6-3/8"	19-5/8"	6-3/4"

DESCRIPTION

- New Construction 3-Light Linear yoke-mounted recessed fixture comprised of separate housing and trim. Trim design allows use in ceilings up to 2" thick. No IC, must maintain 3" clearance from any insulation on all sides.

HOUSING:

3/4" overlap flanges combined with "pull-tight" torsion springs allows forgiveness in minor dry wall cutting errors.

MOUNTING:

Designed to be installed with overlap flange trim. Universal mounting brackets allow the use of conduit, HB or FB bar stock, or "C" channel bars. May be used as trimless for "mud in" installation.

AIMING:

Vertical: Inner Ring 40° - Outer Ring 45°
Rotation: 358°

LAMPING:

Use (3) PAR30, 120V 75W maximum per lamp. (Lamp not included).

LISTING:

UL & CUL Listed.

ECO-LITE

Specialty Lighting Products

33 Rockland Park Ave, Tappan, NY 10983

Tel. 800-345-9652 Fax 845-365-9777

www.eco-lite.com

PAR 30 LED SPIRAL, Available in 3K, 4K, and 5K

Equivalent Source

Standard Up to 75W Halogen

High Output Up to 90W Halogen

L70 lumen depreciation

design criteria = 50,000 hours

Early Submission

ENERGY STAR Life = 25,000 hours²

Housing Painted

Socket E26 Edison base (US)

E27 (Europe)

Beam Spread 15°, 25°, 40°

Spot, Narrow Flood, Flood

Operating Temperature -20°C to +40°C

MOL 4.56", 115.847mm


Voltage 120 & 230 VAC

Weight .099lbs., 450g

Power Factor ≥70

Warranty 5 year limited


Standards UL1993, File: E320663

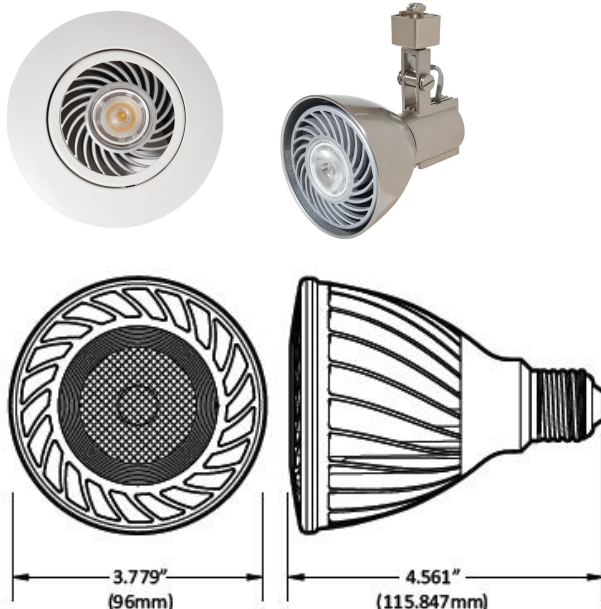

ANNUAL OVERALL SAVINGS²

Standard Halogen

PAR30



² Savings based on 4,000 annual hours of operation, \$0.10 average cost per KWH. ³ \$40/hr. cost of labor and 15 minutes maintenance time to change lamp.

PAR30 Lifetime Savings: \$533

FEATURES

- Dimmable to 5% of light on most dimmers.³
- Up to three unique beam distributions for application flexibility.
- Suitable for wet locations.
- 15/18 Watts – 80% more efficient than comparable 75/90 Watt Halogen lamp.
- Maintenance free operation, lasts up to 16 times longer than conventional lighting.
- Superior thermal management allows for product usage in enclosed luminaires.
- Centralized optical package provides high quality point source beam versus pixilated designs.
- RoHS compliant – contains no mercury or lead.

DIMMER CAPABILITIES

Make	Model
Ace	34050, 3027596
Cooper	9536AD
Leviton	6633-PL, 6684, 6631, IPI06-1LX
Lutron	S-600PR-WH, DV-600PR-WH, TG-600PR-WH, AY600P, Q600P, GL600, CN-600PHW, DV-603PG, S-600, S-600P, LG-600P, D-600PH, TT-300NLH, TG-603PG, HW/LP-RPM-4A-120, HW/LP-RPM-4U-120, QSG-6D, SZ-6ND, HW/LP-RPM-4A-120, HW/LP-RPM-4U-120, HxD-6ND, QSG-6D, PHPM-WBX w/DVF-103P, PHPM-PA w/QSG-6D
Legrand	DrRD4W